

ADA SIGNAGE INSTALLATION GUIDELINES


The desired mounting location for ADA Compliant Signage is on the wall adjacent to the latch side of the door, followed by the nearest adjacent wall. ADA Signs should NOT be mounted on a door, unless this is the only option available.





ADA Signage should be installed on the latch side of the door, at a distance no lower than 48" above the finished floor and no higher than 60" above the finished floor.

This rule allows for different size ADA signs in a facility to have uniform viewing.


MOUNTING LOCATION

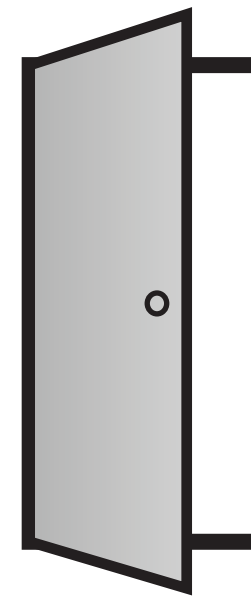


In the case of outward swinging doors, the sign must be mounted to the wall outside of the arc of the door swing. The sign should be located within an 18" x 18" square of clear floor space (18" away from the door and 18" away from the wall).

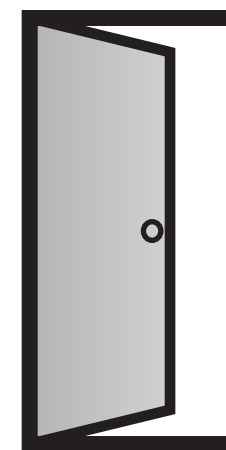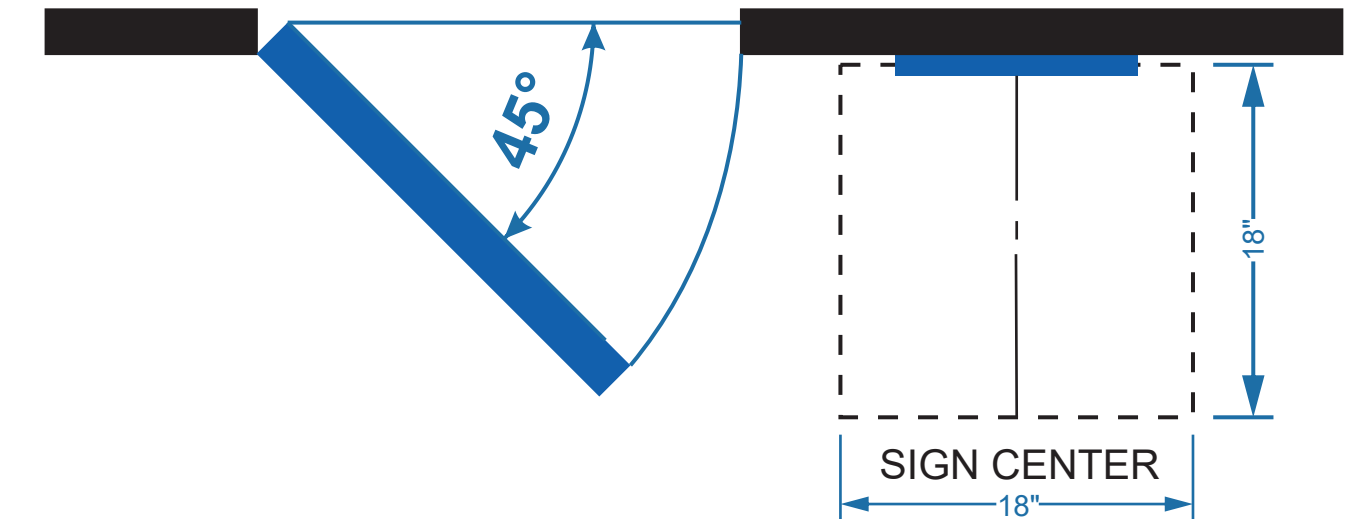


Single door: Sign shall be mounted next to door on the latch side.

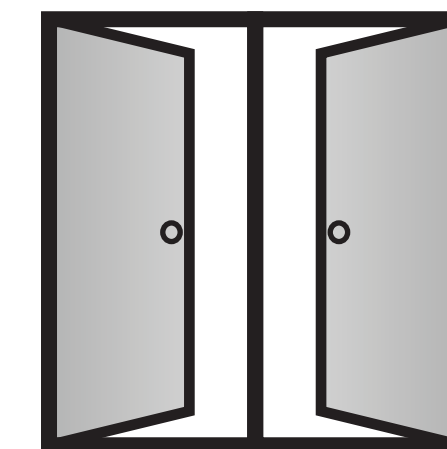

Double doors (two active leaves): Sign shall be located to the right of right handed door.

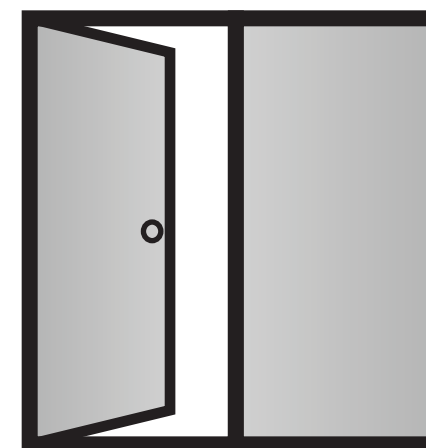

Double doors (one active leaf): Sign shall be located on inactive leaf.

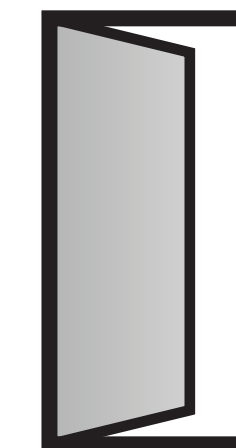

Inward swinging doors: Sign may be mounted on door if three criteria are met: 1) the door closes automatically, 2) the sign is mounted on the push side of the door, 3) the door does not have a hold-open device. Common examples of doors that meet these criteria are kitchen and restroom doors.

This information is based on guidelines which can be found at www.ada.gov in Chapter 7, Section 703. Adhere to your local building authority for local code & regulations updates.

MOUNTING INSTRUCTIONS

1. Use double sided foam tape and a few drops of silicone.
2. Be sure wall surface is clean and dry.
3. Peel liner from foam tape.
4. Apply a small amount of silicone to back of sign but away from edges.
5. Align sign in proper position and press.